

## EFR 9180-B

600 - 1000 HP Turbo



## EFR 9180-C

600 - 1000 HP Turbo



## EFR 9180-D

600 - 1000 HP Turbo



### FEATURES

- Gamma-Ti turbine wheel
- Integrated Compressor Recirculation Valve (CRV)

- Dual ceramic ball bearing assembly with metal cage
- Boost Control Solenoid Valve (BCSV)
- Forged Milled Compressor Wheel (FMW)

- Extended tip technology
- Compressor cover with speed sensor mounting provisions

Product - (TYPE)	Complete Turbo	Bearing Housing Material	Super-Core**	TURBINE HOUSING				
				Assembly	A/R	Inlet	Scroll	Waste-gate
9180-B	179358	Iron	179356	12801008002	0.83	T3	Single	Yes
9180-C	12809880000	Iron	179356	12801019009	0.92	T4	Twin	Yes
9180-D	179394	Iron	179356	12801019001	1.05	T4	Twin	No
9180-H	-	-	-	12801008006	1.45	T4	Twin	No
9180	-	Aluminum*	12919097001	-	-	-	-	-
9180	-	Iron	179356	-	-	-	-	-


Turbo Frame Size	B2
Comp. Wheel Inducer Dia. (mm)	68
Comp. Wheel Outer Dia. (mm)	91
Turbine Wheel Exducer Dia. (mm)	73
Turbine Wheel Outer Dia. (mm)	80

\*Aluminum bearing housings require cooling

\*\*The following components are not included as part of the Super-Core: Turbine Housing, Clamp Plate Hardware, Wastegate, and Actuator

### COMPRESSOR MAP / APPLICABLE TO ALL 9174 AND 9180 UNITS

Comp. Wheel Inducer Dia. (mm) 68  
Comp. Wheel Outer Dia. (mm) 91

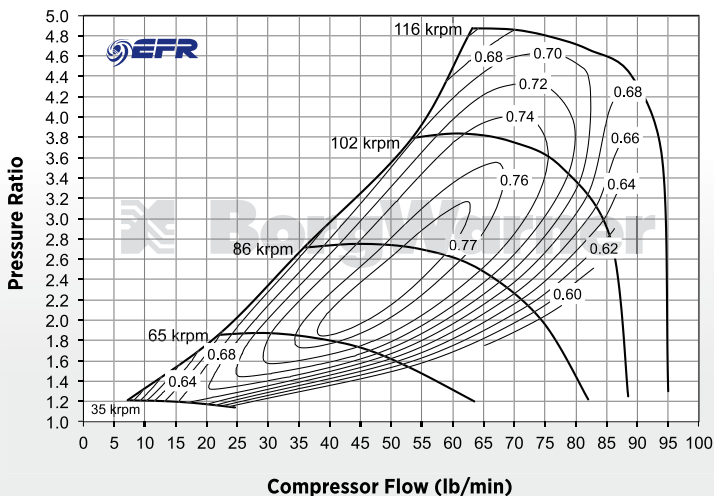

### OPTIONAL HARDWARE

See page 37 for: Speed Sensor, Turbine Gaskets & V-Bands, Oil Drain Gasket & Fitting, Actuators & Brackets



Compressor Cover  
SX-E Style

H-Type  
Turbine Housing

12911013005

12801008006

SEE PAGE 35 FOR FRAME DIMENSIONS

SEE PAGE 61 FOR SPEED SENSOR INSTALLATION DETAILS