

# EFR 9274 Aluminum Super-Core

600 - 1050 HP



# EFR 9274 Iron Super-Core

600 - 1050 HP



## FEATURES

- Gamma-Ti turbine wheel
- Integrated Compressor Recirculation Valve (CRV)
- Dual ceramic ball bearing assembly with metal cage
- Boost Control Solenoid Valve (BCSV)
- Black Anodized Forged Milled Compressor Wheel (FMW)
- Extended tip technology
- Compressor cover with speed sensor mounting provisions

NEW!


Product - (TYPE)	Complete Turbo	Bearing Housing Material	Super-Core**	TURBINE HOUSING					Turbo Frame Size	B2
				Assembly	A/R	Inlet	Scroll	Waste-gate		
9274-B	-	-	-	12741008000	0.83	T3	Single	Yes	Comp. Wheel Inducer Dia. (mm)	72
9274-C	-	-	-	12741008001	0.92	T4	Twin	Yes	Comp. Wheel Outer Dia. (mm)	91
9274-D	-	-	-	12741019002	1.05	T4	Twin	No	Turbine Wheel Exducer Dia. (mm)	65
9274-H	-	-	-	12741008003	1.45	T4	Twin	No	Turbine Wheel Outer Dia. (mm)	74
9274	-	Aluminum*	12747100021	-	-	-	-	-		
9274	-	Iron	12747100023	-	-	-	-	-		

\*Aluminum bearing housings require cooling

\*\*The following components are not included as part of the Super-Core: Turbine Housing, Clamp Plate Hardware, Wastegate, and Actuator

### COMPRESSOR MAP / APPLICABLE TO ALL 9274 UNITS

Comp. Wheel Inducer Dia. (mm) 72  
Comp. Wheel Outer Dia. (mm) 91

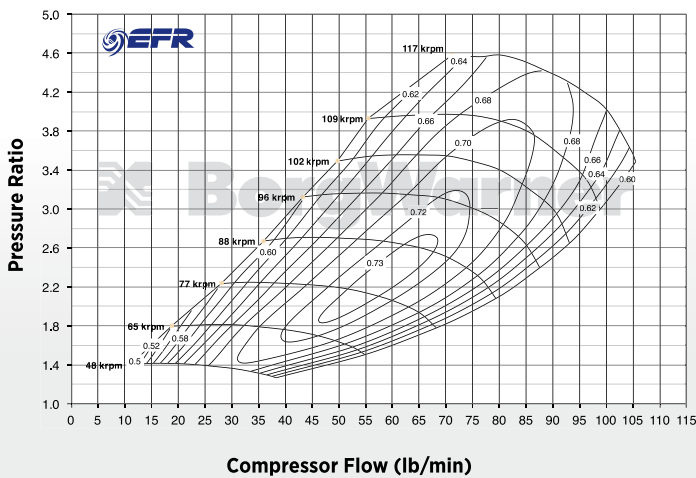

### OPTIONAL HARDWARE

See page 37 for: Speed Sensor, Turbine Gaskets & V-Bands, Oil Drain Gasket & Fitting, Actuators & Brackets



H-Type Turbine Housing

12741008003

SEE PAGE 35 FOR FRAME DIMENSIONS

SEE PAGE 61 FOR SPEED SENSOR INSTALLATION DETAILS