


G-Series II G45-1610		Compressor				Turbine		
		Inducer	Exducer	Trim	A/R	Inducer	Exducer	Trim
HP: 750-1610	Disp: 2.0L-8.0L	79mm	98mm	65	0.85	89mm	82mm	84
Supercore		PN						
		938339-5004S						
CHRA		PN						
		938338-5004S						
Turbine Kits:		PN		A/R	Inlet	Outlet	Wastegate	Divided
Free Float		757707-0019		1.01	V-Band	V-Band	External	N
		757707-0020		1.15	V-Band	V-Band	External	N
		757707-0021		1.28	V-Band	V-Band	External	N
		757707-0022		1.44	V-Band	V-Band	External	N
		757707-0023		1.01	T4	V-Band	External	Y
		757707-0024		1.15	T4	V-Band	External	Y
		757707-0025		1.28	T4	V-Band	External	Y
		757707-0026		1.44	T4	V-Band	External	Y

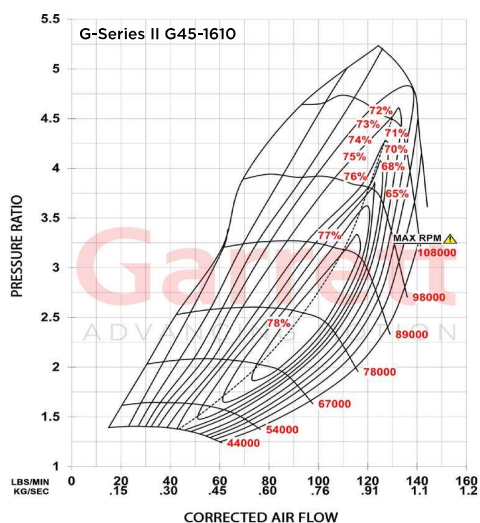

WARNING: The use of this product above max turbocharger speed is at the owner's risk, and can result in damage and premature failure. To protect the turbocharger from overspeed when operating, a speed sensor port is machined into the compressor housing for the fitment of speed sensor part numbers 781328-0003 (includes sensor and gauge), 781328-0004 (includes speed sensor), or [G-Smart Bluetooth Module with sensor \(PN 923586-0003\)](#). Sensor Kits sold separately.

* Performance results of this product are highly dependent upon your vehicle's modifications and tuning/calibration. The horsepower numbers represented are based on gas stand testing.

Power Of Legends. Durability Of Champions.